

MONITORING PROCESS VARIATION USING MODIFIED EWMA

Aamir Saghir, Muhammad Aslam, Alireza Faraz, Liaquat Ahmad, Cédric Heuchenne

REPRINT | 2021 / 40

RESEARCH ARTICLE

WILEY

Monitoring process variation using modified EWMA

Aamir Saghir¹ | Muhammad Aslam²  | Alireza Faraz^{3,4} | Liaquat Ahmad⁵ | Cedric Heuchenne³¹Department of Mathematics, Mirpur University of Science and Technology (MUST), Mirpur-10250 (AJK), Pakistan²Department of Statistics, Faculty of Science, King Abdulaziz University, Jeddah 21551, Saudi Arabia³HEC Liège, Management School of the University of Liège, Liège 4000, Belgium⁴Logistikum, University of Applied Sciences Upper Austria, Steyr 4400, Austria⁵Department of Statistics and computer Science, UVAS Business School, University of Veterinary and Animal Sciences, Lahore 54000, Pakistan

Correspondence

Muhammad Aslam, Department of Statistics, Faculty of Science, King Abdulaziz University, Jeddah 21551, Saudi Arabia.
Email: aslam_ravian@hotmail.com

Abstract

A new control chart, namely, modified exponentially weighted moving average (EWMA) control chart, for monitoring the process variance is introduced in this work by following the recommendations of Khan et al.¹⁵ The proposed control chart deduces the existing charts to be its special cases. The necessary coefficients, which are required for the construction of modified EWMA chart, are determined for various choices of sample sizes and smoothing constants. The performance of the proposed modified EWMA is evaluated in terms of its run length (RL) characteristics such as average RL and standard deviation of RL. The efficiency of the modified EWMA chart is investigated and compared with some existing control charts. The comparison reveals the superiority of proposal as compared with other control charts in terms of early detection of shift in process variation. The application of the proposal is also demonstrated using a real-life dataset.

KEYWORDS

control charts, modified EWMA statistic, Monte Carlo simulation, process variation, run length

1 | INTRODUCTION

Control chart is an important tool of statistical process control for monitoring the process deviation and improving the quality of the products (see Montgomery¹). Two types of control charts, ie, variable and attribute, are commonly used in statistical process control literature. Variable control charts are used when the quality characteristics of interest is numeric such as height, weight, or temperature, while the attribute control charts are developed for the non-numeric characteristics of the interested quality as the good/defective items, satisfied/not-satisfied, or the small/medium/large items. The variable quality characteristics provide more information about the process as compared with the attribute.² The control charts for location are developed for monitoring the process average, while the dispersion charts are applied for monitoring the process variation. Dispersion charts are considered first to monitor the process variation as it is common assumption of the Shewhart average chart to assume that the process standard deviation rests constant (see Acosta-Mejia et al³). The dispersion charts have been explored by many quality control researchers including Lowery et al.⁴

Exponentially weighted moving average (EWMA) chart was introduced by Roberts,⁵ and, originally, it was developed for normally distributed data. Nowadays, EWMA charts have widespread usage in analytical processes (Abbasi⁶), industrial production processes (Lucas and Saccucci⁷), public health surveillance (Woodall⁸), and other procedures. An EWMA chart dominates the Shewhart chart in detecting small to moderate shifts in terms of statistical performance. The general form for the two-sided EWMA chart is given in many textbooks, including Montgomery.¹ The EWMA statistic is the exponentially weighted average of the previous as well as the current observations. The typical weight parameter λ (ranging from 0 to 1), also known as a smoothing parameter, performs well for small values (between

0.05 and 0.25) for monitoring the production processes.¹ A lot of work has been done in the literature on designing and studying the performance of EWMA control charts including.⁹⁻¹¹

The researchers are continuously endeavoring to develop a robust technique for the early detection of the shifted process so that the losses incurred by the manufactured process are avoided. Gan¹² developed the modified EWMA control chart for the monitoring of the binomial counts. Later, Gan¹³ introduced three modified EWMA statistics for detecting smaller shifts in the process for which the Shewhart chart is less effective. Patel and Divecha¹⁴ proposed a modified EWMA chart for monitoring the process mean when small and abrupt shifts occur in the process. Recently, in order to increase the fast detecting ability of the EWMA statistic, a modified EWMA statistic was introduced by Khan et al.¹⁵ Unlike the conventional EWMA statistic, a second parameter k is introduced in it for quick detection of the small process shifts. It has been observed that the modified EWMA statistic is capable of detecting overall mean shift as compared with the traditional EWMA statistic. Latterly, Schmid¹⁶ proposed modified EWMA control chart for monitoring the time series data. Other work on the development of EWMA control charts based on modified EWMA statistics includes Aslam et al,¹⁷ Khan et al,¹⁸ Herdiani et al,¹⁹ Zhang et al,²⁰ Lampereia et al,²¹ etc. All these articles concluded that the modified EWMA control chart is more capable of detecting early shift in process parameter under study as compared with the traditional EWMA control chart. Therefore, this article proposes an EWMA control chart using modified EWMA statistic for efficient monitoring of process variation.

The rest of the paper is organized as follows: design of the proposed chart is developed in Section 4. In Section 3, the performance of the proposed chart is given. In Section 4, the designing for the estimation of parameters of the modified EWMA chart is explained. In Section 5, the designing of the out-of-control performance of the proposed chart and its comparison is elaborated. The application of the proposed chart is demonstrated in Section 6. Finally, the conclusions and the future recommendations are given in the Section 7.

2 | DESIGN OF THE PROPOSED CHART

It is assumed that the quality of interest $X_t(t \geq 1)$ follows the normal distribution with mean μ and variance σ^2 . Our interest is only to detect any change in the process of dispersion $\delta_t^2 = \sigma_t^2/\sigma_0^2$, where σ_t^2 is shifted variance and σ_0^2 in-control variance. Without loss of generality, it is assumed that $\mu = 0$. Define a random variable $Y_t = \ln(S_t^2/\sigma_0^2)$, where

S_t^2/σ_0^2 is a gamma distributed random variable with parameters $(n-1)/2$ and $2\delta_t^2/(n-1)$. The resulting distribution of Y_t is log-gamma distribution, and Lawless²² showed that it can be approximated by a normal distribution, ie, $Y_t \approx N(\mu_Y, \sigma_Y^2)$, where

$$\mu_Y = \ln(\delta_t^2) - \frac{1}{n-1} - \frac{1}{3(n-1)^2} + \frac{2}{15(n-1)^4} \text{ and } \sigma_Y^2 = \frac{2}{n-1} + \frac{2}{(n-1)^2} + \frac{4}{3(n-1)^3} - \frac{16}{15(n-1)^5}.$$

Based on this assumption, we propose a control chart using modified EWMA statistic for monitoring the process variation.

Let a random sample $X_{t1}, X_{t2}, \dots, X_{tn}$ of size n is drawn at time (or subgroup) t and measure Y_t . The modified EWMA statistic, denoted by M_t , having a smoothing constant λ at time t can be defined as

$$M_t = (1 - \lambda)M_{t-1} + \lambda Y_t + k(Y_t - Y_{t-1}) \quad (1)$$

Here, $M_0 = 0$ and $Y_t = \ln(S_t^2/\sigma_0^2)$ is log-transformed random variable, which is ratio of sample variance to population variance. The smoothing constant in the range of $0.05 < \lambda \leq 0.25$ is usually recommended by Montgomery.¹ The constant $-1 \leq k \leq 1$ may be chosen independently of λ , but here, the optimal choice of k , ie, $k = -\lambda/2$, is used (derived by Khan et al¹⁵). Further note that, when $k = 0$, the modified EWMA statistics reduces to Crowder and Hamilton²³ EWMA statistic, and, at $k = 1$, it reduces to Patel and Divecha¹⁴ first order auto-correlated EWMA statistic.

After successive substitution, statistic M_t defined in Equation (1) can be rewritten as

$$M_t = (1-\lambda)^t M_0 + \sum_{i=0}^{t-1} (1-\lambda)^i [(\lambda + k)Y_{t-i} - kY_{t-i-1}] \quad (2)$$

The mean and variance of modified EWMA statistic are given as follows.

$E(M_t) = \mu_Y$ and

$$V(M_t) = \frac{(\lambda + 2\lambda k + 2k^2)}{(2 - \lambda)} \sigma_Y^2 \quad (3)$$

The process working at dispersion level σ_0^2 is considered in-control. To detect an increase in process variance ($\delta_t^2 > 1$), the EWMA statistic $Q_t = \max(M_t, 0)$ signals an out-of-control if Q_t is greater than

$$UCL = L_Q \sqrt{\frac{(\lambda + 2\lambda k + 2k^2)}{(2 - \lambda)} \sigma_Y^2} \quad (4)$$

where L_Q can be determined for fixed value of n and to achieve a desired ARL_0 .

Similarly, a decrease in process variance is detected when $\dot{Q}_t = \min(M_t, 0)$ is less than

$$LCL = -L_{\dot{Q}} \sqrt{\frac{(\lambda + 2\lambda k + 2k^2)}{(2 - \lambda)} \sigma_Y^2} \quad (5)$$

where $L_{\dot{Q}}$ is control charting constant and can be determined for fixed value of n to achieve a desired ARL_0 .

The limits defined in Equations (3) and (4) are called one sided control limits of the modified EWMA statistic. However, the two sided control limits for modified EWMA chart can be determined using both statistics \dot{Q}_t and Q_t . In the rest of this article, we will consider a two sided modified EWMA control chart.

The two sided control limits for the modified EWMA are defined as

$$\left. \begin{aligned} LCL &= -L \sqrt{\frac{(\lambda + 2\lambda k + 2k^2)}{(2 - \lambda)} \sigma_Y^2} \\ UCL &= L \sqrt{\frac{(\lambda + 2\lambda k + 2k^2)}{(2 - \lambda)} \sigma_Y^2} \end{aligned} \right\} \quad (6)$$

where $L = L_Q = L_{\dot{Q}}$ is control chart coefficient need to be determined for a fixed value of n, λ, k , and desire in-control ARL_0 . The proposed modified EWMA chart is based on two constants λ and k . The proposed chart is the extension of the existing control charts. The proposed control chart reduces to control chart proposed by Crowder and Hamilton²³ when $k = 0$.

The proposed modified EWMA control chart will signal if $M_t > UCL$ or $M_t < LCL$; otherwise, the process is declared to be work under in-control scenario. The probability of signal can be found as

$$\text{Prob.of signal} = \Pr(M_t > UCL \text{ or } M_t < LCL | \delta_t^2) \quad (7)$$

3 | THE PERFORMANCE EVALUATION

The average run length (ARL), which is the mean of run length (RL) distribution, is the most important and widely used measure to evaluate the performance of control charts. The ARL is defined as *the average number of subgroups until an out of control signal is raised*. In case, the process is in-control, the ARL should be sufficiently large to avoid too many false alarms, while, for the out-of-control process, the ARL should be sufficiently small for rapid detection of shift.

$$ARL_0 = 1 / [1 - \Pr(LCL < M_t < UCL | \delta_t^2 = 1)] \quad (8)$$

and

$$ARL_1 = \frac{1}{\text{Prob.of Signal}} \quad (9)$$

The accurate measure of ARL has been thoroughly discussed by Hussain et al.²⁴ ARL for the EWMA chart have been discussed by Chananet et al.²⁵ and Li et al.²⁶

The Equations (8) and (9) can be solved easily if the probability density function of modified EWMA statistic M_t is known. The exact distribution of modified EWMA statistic defined in Equation (1) is more explicit and, up to our best knowledge, is not available in the literature. Therefore, the RL characteristic of the proposed control chart can be investigated through Monte Carlo simulation method. For this purpose, the following algorithm in R package is developed and RL characteristic are obtained for various choices of parameters.

The following algorithms have been used in R to find the results of this study.

Algorithm 1: Determination of control charting constant (L).

- Step 1. Sample of size n is drawn from normal distribution $(0, 1)$, without loss of generality, and $Y_i = \ln(S_i^2/\sigma_0^2)$ is calculated.
- Step 2. Using the value of Y_i obtained in step 1, modified EWMA statistic M_t is calculated for a specified value of λ and k . This process is repeated up to 10 000 times, and, at the end of this step, we have 10 000 modified EWMA statistics.
- Step 3. The control charting constant L is determined to satisfy the in-control condition of $\Pr(LCL < M_t < UCL) = 1 - \alpha$.
- Step 4. The above steps 1 to 3 are repeated 1000 times, and, at the end of this step, we have 1000 L values for specific choice of n , λ , and k .
- Step 5. Finally, the average value of L is chosen for further analysis with standard deviation in the range 0.0044–0.060.

Algorithm 2: Determination of run length characteristics.

- Step 1. Control limits of the modified EWMA chart are constructed using the charting constant determined in above algorithm for specific choice of n , λ , and k .
- Step 2. Sample of size n is drawn from normal distribution $(0, \sigma_1^2)$, and $Y_i = \ln(S_i^2/\sigma_1^2)$ is calculated.
- Step 3. Using the value of Y_i obtained in step 2, modified EWMA statistic M_t is calculated.
- Step 4. The probability of signal using the Equation (7) and run length using the Equation (9) are calculated.
- Step 5. The above steps 1 to 4 are repeated 10 000 times, and, at the end of this step, we have 10 000 average run length values.
- Step 6. Finally, the average and standard deviation of 10 000 average run length values. These ARL and SDRL are used.

TABLE 1 The control chart multiplier L for various values of n , λ and k to achieve the in-control $ARL_0 = 200$

k	n	λ				
		0.05	0.10	0.15	0.20	0.50
0	5	1.194	1.570	1.761	1.971	2.009
	8	1.285	1.616	1.835	2.010	2.025
	10	1.360	1.672	1.870	2.027	2.052
	15	1.473	1.758	1.933	2.057	2.088
$-\lambda/2$	5	0.975	1.269	1.469	1.635	2.107
	8	1.121	1.386	1.550	1.681	2.164
	10	1.207	1.467	1.620	1.735	2.274
	15	1.340	1.590	1.725	1.821	2.367
1	5	4.122	3.824	3.640	3.515	3.296
	8	4.082	3.803	3.624	3.481	3.164
	10	4.045	3.785	3.601	3.465	3.105
	15	4.001	3.762	3.585	3.440	3.055

4 | DESIGNING FOR THE ESTIMATION OF PARAMETERS OF THE MODIFIED EWMA CHART

The traditional design procedure for selecting the parameters of EWMA charts based on only the ARL may lead to high probability of false out-of-control signal for some types of EWMA charts as discussed by Chan and Zhang.²⁷ They also recommended the procedure for selecting the parameters based on the ARL and standard deviation of the RL (SDRL) with the constraint that $SDRL \leq ARL$ when the process is in-control and out-of-control. Using the algorithm 1, a Monte Carlo simulation approach with 10 000 iterations is used to approximate the RL distribution of the proposed modified EWMA chart. Note that Kim²⁸ and Schaffer and Kim²⁹ indicated that 5000 replications are sufficient to estimate the ARL to an acceptable level of precision in many control chart settings. The zero state or initial state ARLs are computed in this study. The control charting constant L is determined in such a way that the two one-sided charts produce equal individual ARL_0 so that the overall ARL_0 of the two-sided chart is approximately equal to 200. The values of L , for a fixed value of n , λ , k , and $ARL_0 = 200$, are given in Table 1.

From Table 1, it can be seen that

- The control charting constant depend on k , n , and λ for a fixed ARL_0 .
- The values of L decreases with increase in sample size when other parameters are fixed.
- Increase in smoothing weight increase the value of L for a fixed k and n except the value of $k = 1$.

5 | OUT-OF-CONTROL PERFORMANCE

Suppose that the process goes out-of-control with respect to variance and $\sigma_1^2 = \rho \cdot \sigma_0^2$ be the new process variance with ρ time change in σ_0^2 . Under the assumption that the data follows a normal distribution with mean 0 (without loss of generality) and variance σ_1^2 , the probability of signal given in Equation (7) can be redefined as

$$\begin{aligned} P_{out} &= Pr(M_t > UCL | \sigma_1^2) \text{ or } P(M_t < LCL | \sigma_1^2) \\ P_{out} &= Pr(M_t > UCL | \sigma_1^2) + P(M_t < LCL | \sigma_1^2) \\ P_{out} &= 1 - F_{M_t}(UCL | \rho \sigma_0^2) + F_{M_t}(LCL | \rho \sigma_0^2) \end{aligned} \quad (10)$$

where $F_{M_t}(\cdot)$ be the cumulative density function of M_t .

The exact probability density function of modified M_t is explicitly complicated and is not available in close form. Therefore, again we have used simulation procedure to determine the empirical CDF of M_t . The above algorithm 2 is used and P_{out} determined for various choices of n , k , λ and ρ .

In Tables 2–5, the values of ARL and SDRL have been estimated using the above mentioned equations. The zero state RL performance of the modified EWMA control chart for the sample of size 5 and 10, the smoothing constant $\lambda = 0.05$ and 0.10 and control constant $k = 0, -\lambda/2$ and 1 are given for different shift levels 0.50 to 2.00. It can be observed from these tables that SDRL is always smaller than ARL for all the process settings. A control chart scheme is considered as a better one if it has smaller ARL values, so the proposed chart is studied at different choice of k to identify the suitable value of k .

Table 2–5 shows that

- The proposed chart tends to become Crowder and Hamilton²³ chart when the control $k = 0$.
- The proposed control chart performs better for the choice of $k = -\lambda/2$ than any other value of k (0 or 1 considered here). For example, when a sample of $n = 5$ and $\lambda = 0.05$ is used, then a shift of 0.70 is detected by an average samples of 19.104 for the existing chart ($k = 0$), while the proposed control chart detects the same shift in average of samples of 15.424 ($k = -\lambda/2$). This shows that the proposed chart is 23% better in detecting this shift. The same performance can be seen for other process settings.
- The modified EWMA control chart performs better than the case when $k = 1$ (as considered by Patel and Divecha¹⁴), for example, when a sample of $n = 5$ and $\lambda = 0.05$ is used, then a shift of 0.70 is detected by an average samples of 29.717 for the existing chart, while the proposed control chart detects the same shift in average of samples of 15.424. This shows that the proposed chart is 93% better in detecting this shift. The same performance can be seen for other process settings.

TABLE 2 Zero state run length performance of the MEWMA chart at $n = 5$ and $\lambda = 0.05$

ρ	$k = 0$		$k = -\lambda/2$		$k = 1$	
	ARL	SDRL	ARL	SDRL	ARL	SDRL
0.50	4.567	2.345	2.287	1.154	7.314	5.670
0.60	8.995	7.956	4.933	3.005	16.161	14.223
0.70	19.104	14.234	15.424	13.256	29.717	26.745
0.80	40.097	31.658	29.671	23.228	55.216	52.325
0.90	85.707	65.323	77.093	68.098	104.284	93.2715
1.00	200.747	188.776	201.071	189.751	200.890	192.356
1.10	84.345	75.563	71.508	60.005	96.345	85.456
1.20	33.756	25.097	26.504	20.534	61.345	55.445
1.30	18.677	11.876	15.841	10.054	41.223	34.449
1.40	13.087	7.082	11.170	9.113	25.334	19.777
1.50	10.542	5.667	9.083	4.264	18.544	14.332
2.00	6.793	3.045	5.005	1.813	11.223	7.556

Abbreviations: ARL, average run length; MEWMA, modified exponentially weighted moving average; SDRL; standard deviation of the run length.

TABLE 3 Zero state run length performance of the MEWMA chart at $n = 5$ and $\lambda = 0.10$

ρ	$k = 0$		$k = -\lambda/2$		$k = 1$	
	ARL	SDRL	ARL	SDRL	ARL	SDRL
0.50	3.987	1.567	2.106	0.986	5.445	3.099
0.60	9.177	5.470	4.086	2.896	17.189	11.234
0.70	21.123	17.209	11.037	9.556	38.334	26.223
0.80	60.223	51.890	35.888	30.022	90.990	80.224
0.90	110.445	98.990	102.924	91.990	130.776	122.113
1.00	201.005	192.113	200.628	192.556	200.888	189.445
1.10	85.456	76.003	76.998	69.977	101.12	94.332
1.20	42.220	35.344	32.755	27.564	72.339	63.224
1.30	25.539	19.223	18.706	12.867	48.228	39.002
1.40	16.435	10.066	12.532	7.725	31.097	21.091
1.50	13.112	7.199	9.976	5.378	25.489	13.223
2.00	8.509	3.244	5.020	2.114	14.559	8.223

Abbreviations: ARL, average run length; MEWMA, modified exponentially weighted moving average; SDRL; standard deviation of the run length.

The comparative efficiency of the proposed chart has also been shown on the graph. It can be seen in the Figures 1-3. The proposed chart shows better efficiency in early detecting the out-of-control process for all process settings at different shift levels.

5.1 | Comparison with other EWMA charts

Further, the efficiency of the proposed modified EWMA variance chart is compared with the recently proposed charts by Huwang et al³⁰ and Zou and Tsung.³¹ Fixing the in-control ARL of two charts, the out-of-control ARL is measured for both charts at various values of ρ as efficiency measure. The results of out-of-control ARL are provided here in Table 6 and Table 7 for ARL_0 . However, the results can be determined for any other value.

Table 6 and Table 7 reveals that the proposed modified EWMA variance chart performs better than the charts of Huwang et al³⁰ and Zou and Tsung.³¹ The efficiency of the proposed chart in terms of producing smaller values of

TABLE 4 Zero state run length performance of the MEWMA chart at $n = 10$ and $\lambda = 0.05$

ρ	$k = 0$		$k = -\lambda/2$		$k = 1$	
	ARL	SDRL	ARL	SDRL	ARL	SDRL
0.50	4.223	2.005	1.850	0.653	7.889	4.889
0.60	8.778	5.334	3.672	2.417	15.224	9.225
0.70	29.334	21.234	16.871	10.077	54.334	43.532
0.80	156.445	143.223	144.05	130.091	165.223	155.229
0.90	177.445	170.089	159.009	141.223	186.056	156.228
1.00	200.998	192.345	200.934	196.058	201.279	191.287
1.10	35.445	29.770	29.116	22.572	71.890	60.011
1.20	21.224	17.556	12.535	6.758	43.245	37.220
1.30	14.283	10.990	8.333	3.508	28.346	20.078
1.40	8.724	5.332	6.609	2.255	15.489	9.881
1.50	7.665	3.020	5.661	1.709	12.114	6.546
2.00	6.670	1.776	4.243	0.8042	10.134	3.078

Abbreviations: ARL, average run length; MEWMA, modified exponentially weighted moving average; SDRL; standard deviation of the run length.

TABLE 5 Zero state run length performance of the MEWMA chart at $n = 10$ and $\lambda = 0.10$

ρ	$k = 0$		$k = -\lambda/2$		$k = 1$	
	ARL	SDRL	ARL	SDRL	ARL	SDRL
0.50	2.980	1.107	1.676	0.524	4.309	3.002
0.60	4.329	2.128	2.766	1.455	7.998	4.978
0.70	15.224	9.298	8.433	6.766	33.234	21.223
0.80	78.334	64.297	52.211	48.550	108.334	98.768
0.90	142.223	136.556	105.671	99.224	167.889	151.244
1.00	200.005	192.334	200.211	191.456	199.098	189.223
1.10	42.099	36.445	31.366	25.446	68.345	59.456
1.20	20.334	14.234	13.033	7.953	42.998	36.890
1.30	13.229	9.078	8.232	4.005	28.334	21.003
1.40	11.870	7.345	6.356	2.493	20.889	14.334
1.50	8.889	4.329	5.366	1.809	15.754	9.329
2.00	5.768	2.248	3.912	0.825	9.356	4.982

Abbreviations: ARL, average run length; MEWMA, modified exponentially weighted moving average; SDRL; standard deviation of the run length.

out-of-control ARL increases with the increase in sample size. The proposed chart is better than Huwang et al.³⁰ control chart for small shift in the process, which is desirable in the industry.

6 | ILLUSTRATIVE EXAMPLE

The application of the proposed modified EWMA chart is investigated in this section using a real dataset given by Jones-Farmer et al.³² The data consist of patients' waiting time (in minutes) for a colonoscopy procedure. Jones-Farmer et al.³² shown that the process is in-control with respect to dispersion parameter. In order to highlight the ability of the modified EWMA structure to detect changes in the process dispersion parameter, we have introduced contaminations in the original data by multiplying the last six observations by three similar to Abbasi and Miller.³³ Then, the Crowder and

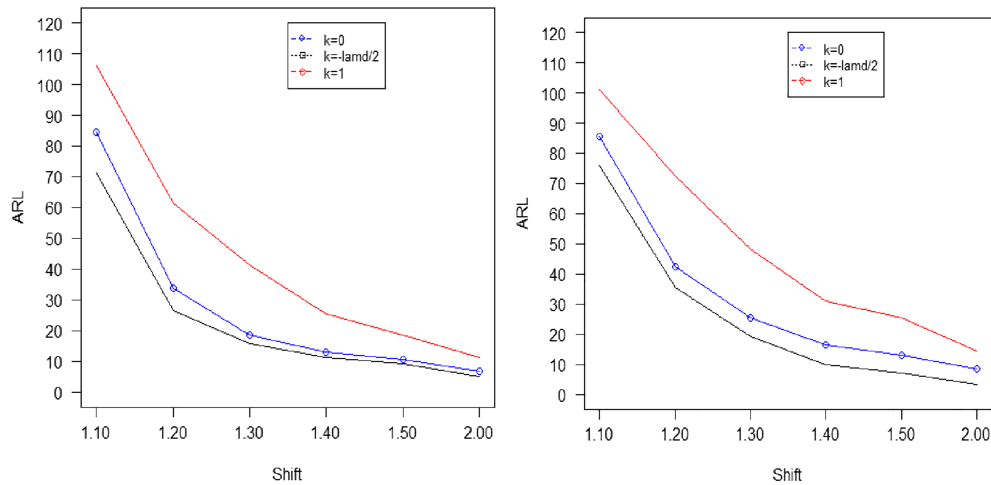


FIGURE 1 ARL curves of the modified EWMA chart at A, $\lambda = 0.05$ and B, $\lambda = 0.10$ for $n = 5$ when process variance increases [Colour figure can be viewed at wileyonlinelibrary.com]

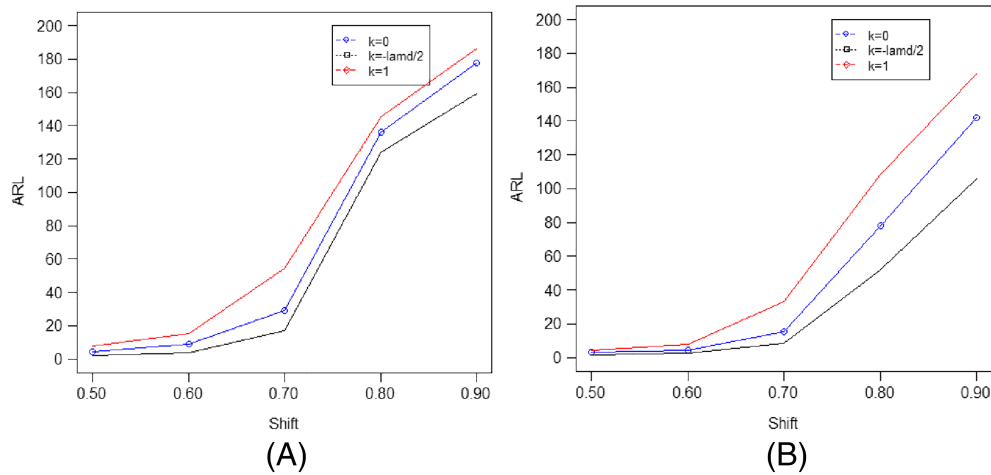


FIGURE 2 ARL curves of the modified EWMA chart at A, $\lambda = 0.05$ and B, $\lambda = 0.10$ for $n = 10$ when process variance decreases [Colour figure can be viewed at wileyonlinelibrary.com]

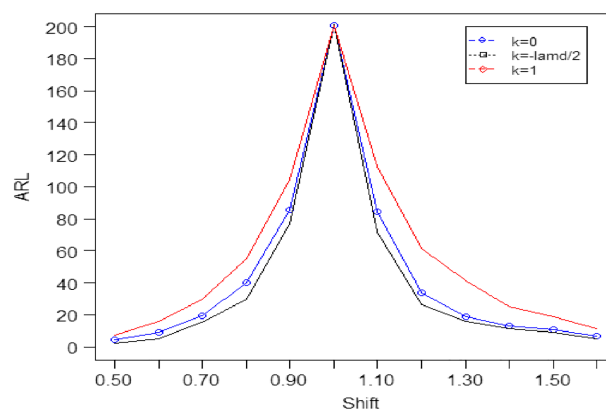


FIGURE 3 ARL curves of the modified EWMA chart for $n = 5$ and $\lambda = 0.05$ for up and down shifts in variance [Colour figure can be viewed at wileyonlinelibrary.com]

TABLE 6 Zero state run length performance of the proposed EWMA with Zou and Tsung³¹ chart at $ARL_0 = 370.00$


ρ	$\lambda=0.05$					
	Modified EWMA chart at $k = -\lambda/2$					
	$n = 5$		$n = 10$		Zou and Tsung ³¹ chart	
	ARL	SDRL	ARL	SDRL	ARL	SDRL
1.00	369.092	350.220	368.995	347.400	370.067	355.505
1.10	123.346	114.45	115.334	99.122	123.055	115.098
1.20	57.045	38.980	48.766	23.334	58.098	39.955
1.30	32.322	21.908	27.698	15.332	33.889	25.660
1.40	21.900	12.898	17.443	9.089	23.657	14.230
1.50	17.334	6.890	14.190	4.556	18.909	7.905
2.00	6.113	4.234	4.909	3.245	7.129	5.220

Abbreviations: ARL, average run length; EWMA, exponentially weighted moving average; SDRL; standard deviation of the run length.

TABLE 7 Zero state run length performance of the proposed EWMA with Huwang et al³⁰ chart at $ARL_0 = 200.00$

ρ	$\lambda=0.05$					
	Modified EWMA chart at $k = -\lambda/2$					
	$n = 5$		$n = 10$		Huwang et al ³⁰ chart	
	ARL	SDRL	ARL	SDRL	ARL	SDRL
0.50	2.287	1.154	1.850	0.653	6.531	4.898
0.60	4.933	3.005	3.672	2.417	9.940	7.045
0.70	15.424	13.256	16.871	10.077	16.925	12.233
0.80	29.671	23.228	144.05	130.091	34.042	27.520
0.90	77.093	68.098	159.009	141.223	91.410	78.586
1.00	201.071	189.751	200.934	196.058	199.000	189.660
1.10	71.508	60.005	29.116	22.572	103.011	90.105
1.20	26.504	20.534	12.535	6.758	49.082	38.552
1.30	15.841	10.054	8.333	3.508	29.062	21.253
1.40	11.170	9.113	6.609	2.255	20.360	14.558
1.50	9.083	4.264	5.661	1.709	15.402	10.998
2.00	5.005	1.813	4.243	0.8042	6.931	4.045

Abbreviations: ARL, average run length; EWMA, exponentially weighted moving average; SDRL; standard deviation of the run length.

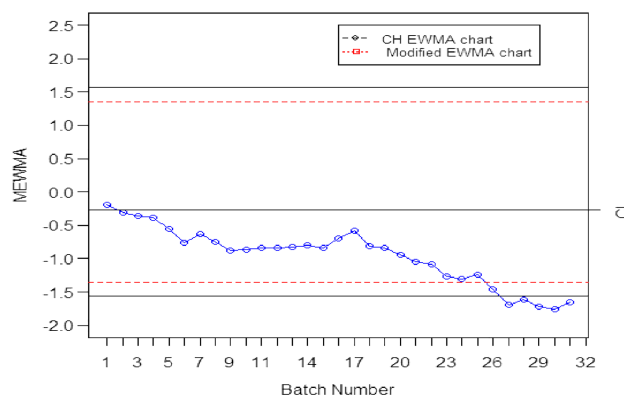**FIGURE 4** Modified EWMA control chart for patients data at $\lambda = 0.10$ [Colour figure can be viewed at wileyonlinelibrary.com]

Hamilton²³ chart, named as CH chart, and the proposed modified EWMA chart are constructed using $\lambda = 0.10$ and $k = -\frac{\lambda}{2}$ in Figure 4 below.

It is obvious from Figures 4 that the CH chart detects out-of-control signals at five sample points, whereas the proposed modified EWMA chart detects all the six problem points. Hence, it is concluded that the modified EWMA chart is more efficient than the CH EWMA chart to detect shift in dispersion more quickly.

7 | CONCLUSIONS AND RECOMMENDATIONS

In this article, a modified EWMA control chart is proposed for efficient monitoring of the process dispersion following the work of Khan et al.¹⁵ The control charting constant L , which is necessarily required for the construction of the proposed control chart, is determined using Monte Carlo simulation. The performance of the proposed modified EWMA control chart is measured in terms of RL characteristics such as ARL and SDRL for several process dispersion level settings using simulation. Tables of the ARL and the SDRL are generated for different shift levels, different smoothing constant values, and different control constant values. The proposed control chart has been compared with two existing charts. It has been observed that the proposed chart is efficient in quick detection of the out-of-control process as compared with existing control charts for monitoring process dispersion. These results are very helpful for the practitioners and researchers for monitoring the process dispersion. Further work along the direction to develop modified EWMA control charts for the monitoring multivariate process dispersion and attribute process can be done, and authors are currently working on this.

ACKNOWLEDGEMENTS

The authors are deeply thankful to the editor and reviewers for their suggestions to improve the quality of the paper.

ORCID

Muhammad Aslam  <https://orcid.org/0000-0003-0644-1950>

REFERENCES

1. Montgomery DC. *Introduction to statistical quality control*. 7th ed. New York: John Wiley; 2012.
2. Balamurali S, Jun CH. Repetitive group sampling procedure for variables inspection. *J Appl Stat*. 2006;33(3):327-338.
3. Acosta-Mejia CA, Pignatiello JA, Rao BV. A comparison of control charting procedures for monitoring process dispersion. *IIE Trans*. 1999;31(6):569-579.
4. Lowry CA, Champ CW, Woodall WH. The performance of control charts for monitoring process variation. *Commun Stat Simul Comput*. 1995;24(2):409-437.
5. Roberts SW. A comparison of some control chart procedures. *Dent Tech*. 1966;8:411-430.
6. Abbasi SA. On the performance of EWMA chart in presence of two components of measurement error. *Qual Eng*. 2010;22(3):199-213.
7. Lucas JM, Saccucci MS. The exponentially weighted moving average control schemes: properties and enhancements (with discussion). *Dent Tech*. 1990;32:1-12.
8. Woodall WH. The use of control charts in health-care and public-health surveillance. *J Qual Technol*. 2006;38(2):89-104.
9. Crowder SV. A simple method for studying run length distributions of exponentially weighted moving average charts. *Dent Tech*. 1987;29:401-407.
10. Crowder SV. Design of exponentially weighted moving average schemes. *J Qual Technol*. 1989;21(3):155-162.
11. Lucas JM, Saccucci MS. Exponentially weighted moving average control schemes: properties and enhancements. *Dent Tech*. 1990;32(1):1-12.
12. Gan F. Monitoring observations generated from a binomial distribution using modified exponentially weighted moving average control chart. *J Stat Comput Simul*. 1990;37(1-2):45-60.
13. Gan F. Monitoring Poisson observations using modified exponentially weighted moving average control charts. *Commun Stat Simul Comput*. 1993;19(1):103-124.
14. Patel AK, Divecha J. Modified exponentially weighted moving average (EWMA) control chart for an analytical process data. *J Chem Eng Mater Sci*. 2011;2(1):12-20.

15. Khan N, Aslam M, Jun CH. Design of a control chart using a modified EWMA statistic. *Qual Reliab Eng Int.* 2017;33(5):1095-1104.
16. Schmid W. On EWMA charts for time series. In: *Frontiers in Statistical Quality Control.* Springer; 1997:115-137.
17. Aslam M, Saghir A, Ahmad L, Jun C-H, Hussain J. A control chart for COM-Poisson distribution using a modified EWMA statistic. *J Stat Comput Simul.* 2017;87(18):3491-3502.
18. Khan N, Yasmin T, Aslam M, Jun C-H. On the performance of modified EWMA charts using resampling schemes. *Oper Res Dec.* 2018;3:29-43.
19. Herdiani ET, Fandrilla G, Sunusi N. Modified exponential weighted moving average (EWMA) control chart on autocorrelation data. *J Phys Conf Ser.* 2018;979(1):012097.
20. Zhang G, Li N, Li S. A modified multivariate EWMA control chart for monitoring process small shifts. *Proceedings of 2011 International Conference on Modelling, Identification and Control, Shanghai, China, June 26-29, 2011.*
21. Lampreia SPGF, Requeijo JFG, Dias JAM, Vairinhos VM, Barbosa PIS. Condition monitoring based on modified CUSUM and EWMA control charts. *J Qual Main Eng.* 2018;24(1):119-132.
22. Lawless JF. *Statistical models and methods for lifetime data.* New Jersey: John Wiley and Sons; 2003.
23. Crowder S, Hamilton M. An EWMA for monitoring a process standard deviation. *J Qual Technol.* 1992;24(1):12-21.
24. Hussain S, Song L, Ahmad S, Riaz M. On auxiliary information based improved EWMA median control charts. *Scientia Iranica.* 2018;25(2):954-982.
25. Chananet C, Sukparungsee S, Areepong Y. The ARL of EWMA chart for monitoring ZINB model using Markov chain approach. *Int J Appl Phys Math.* 2014;4(4):236-249.
26. Li ZH, Zou CL, Gong Z, Wang ZJ. The computation of average run length and average time to signal: an overview. *J Stat Comput Simul.* 2014;84(8):1779-1802.
27. Chan LK, Zhang J. Cumulative sum control charts for covariance matrix. *Stat Sincia.* 2001;11(3):767-790.
28. Kim MJ. Number of replications required in control chart Monte Carlo simulation studies. Ph.D. dissertation, University of Northern Colorado, 2005.
29. Schaffer JR, Kim MJ. Number of replications required in control chart Monte Carlo simulation studies. *Commun Stat Simul Comput.* 2007;36(5):1075-1087.
30. Huwang L, Huang CJ, Wang YHT. New EWMA control charts for monitoring process dispersion. *Comput Stat Data Anal.* 2010;54:2328-2342.
31. Zou C, Tsung E. Likelihood ratio based distribution free EWMA control charts. *J Qual Technol.* 2010;42(2):174-196.
32. Jones-Farmer LA, Jordan A, Champ CW. Distribution-free phase I charts for subgroup location. *J Qual Technol.* 2009;41(3):304-316.
33. Abbasi SA, Miller A. On proper choice of variability control chart for normal and non-normal processes. *Qual Reliab Eng Int.* 2012;28:279-296.

AUTHOR BIOGRAPHIES

Aamir Saghir is currently working as Associate Professor of Statistics in MUST, Mirpur-10250 (AJK), Pakistan. His current research interests include process monitoring and probability modelling.

Dr Muhammad Aslam did his MSc in Statistics (2004) from GC University Lahore with Chief Minister of the Punjab merit scholarship, MPhil in Statistics (2006) from GC University Lahore with the Governor of the Punjab merit scholarship, and PhD in Statistics (2010) from National College of Business Administration & Economics Lahore under the kind supervision of Prof Dr Munir Ahmad. He worked as a lecturer of Statistics in Edge College System International from 2003 to 2006. He also worked as Research Assistant in the Department of Statistics, GC University Lahore from 2006 to 2008. Then he joined the Forman Christian College University as a lecturer in August 2009. He worked as Assistant Professor in the same university from June 2010 to April 2012. He worked in the same department as Associate Professor from June 2012 to October 2014. He worked as Associate Professor of Statistics in the Department of Statistics, Faculty of Science, King Abdulaziz University, Jeddah, Saudi Arabia, from October 2014 to March 2017. He taught summer course as Visiting Faculty of Statistics at Beijing Jiaotong University, China, in 2016. Currently, he is working as a Full Professor of Statistics in the Department of Statistics, King Abdul-Aziz University Jeddah, Saudi Arabia. He has published more than 365 research papers in national and international well-reputed journals including, for example, IEEE Access, Journal of Applied Statistics, European Journal of Operation Research, Information Sciences, Journal of Process Control, Journal of the Operational Research Society, Applied Mathematical Modeling, International Journal of Fuzzy Systems, Symmetry, International Journal of Advanced Manufacturer Technology, Communications in Statistics, Journal of Testing and Evaluation, and Pakistan

Journal of Statistics. His papers have been cited more than 3200 times with h-index 30 and i-10 index 92 (Google Scholar). His papers have been cited more than 1900 times with h-index 23 (Web of Science Citations). He is the author of two books published by VDM, Germany, and Springer, respectively. He has published eight chapters in well-reputed books. He is also HEC-approved PhD supervisor since 2011. He supervised five PhD theses, more than 25 MPhil theses, and 3 MSc theses. Dr Muhammad Aslam is currently supervising two Master theses in Statistics. He is reviewer of more than 70 well-reputed international journals. He has reviewed more than 150 research papers for various well-reputed international journals. He received meritorious services award in research from National College of Business Administration & Economics Lahore in 2011. He received Research Productivity Award for the year 2012 by Pakistan Council for Science and Technology. His name Listed at 2nd Position among Statistician in the Directory of Productivity Scientists of Pakistan 2013. His name Listed at 1st Position among Statistician in the Directory of Productivity Scientists of Pakistan 2014. He got 371 positions in the list of top 2210 profiles of Scientist of Saudi Institutions 2016. He is selected for “Innovative Academic Research & Dedicated Faculty Award 2017” by SPE, Malaysia. He received King Abdulaziz University Excellence Awards in Scientific Research for the paper entitled “Aslam, M., Azam, M., Khan, N. and Jun, C.-H. (2015). A New Mixed Control Chart to Monitor the Process, International Journal of Production Research, 53 (15), 4684–4693.” He received King Abdulaziz University citation award for the paper entitled “Azam, M., Aslam, M. and Jun, C.-H. (2015). Designing of a hybrid exponentially weighted moving average control chart using repetitive sampling, International Journal of Advanced Manufacturing Technology, 77:1927–1933 in 2018.” Prof Muhammad Aslam introduced the area of Neutrosophic Statistical Quality Control (NSQC) the first time. His is the founder of neutrosophic inferential statistics (NIS) and NSQC. His contribution is the development of neutrosophic statistics theory for the inspection and process control. He originally developed theory in these areas under the Neutrosophic Statistics. He extended the Classical Statistics theory to Neutrosophic Statistics originally in 2018. He is the member of editorial board of Electronic Journal of Applied Statistical Analysis, Neutrosophic Sets and Systems, Asian Journal of Applied Science and Technology, and Pakistan Journal of Commerce and Social sciences. He is also member of Islamic Countries Society of Statistical Sciences. He is appointed as an external examiner for 2016/2017 to 2018/2019 triennium at The University of Dodoma, Tanzania. His areas of interest include reliability, decision trees, Industrial Statistics, acceptance sampling, rank set sampling, neutrosophic statistics, and applied Statistics.

Alireza Faraz is working as senior research professor at Logistikum, School of Management, Steyr Campus University of Applied Sciences Upper Austria. His current research interests include control charts and process improvement.

Dr Liaquat Ahmad is currently working as Associate Professor in the Department of Statistics and Computer Science since 2006. He holds PhD (Statistics) degree from Pakistan and MPhil (Statistics) degree from GC University, Lahore. He did his Masters in Economics and Education from University of the Punjab and PGD (Post Graduate Diploma) in Demography from Social Sciences Research Centre, University of the Punjab, Lahore. He has published more than 20 research articles in the international highly reputed impact factor journals. His area of research is Industrial Statistics with particularly focusing repetitive group sampling control charts using different estimators. He also has 13-year experience of teaching Statistics at different levels in the Punjab Education Department. His areas of interest include Statistical quality control, Biostatistical data analysis, Bayesian Statistics, Econometrics, and Educational Measurements. He is also actively providing the services of Biostatistical data analysis to the faculty and the research scholars of the university since 2006. He is member of university time table committee. He has served as hall superintendent, and currently, he is serving as Principal Officer Estate Management Department. He is also ORIC liaison member.

Cedric Heuchenne is working as Professor at Logistikum, School of Management, Steyr Campus University of Applied Sciences Upper Austria. His current research interests include control charts and process improvement.

How to cite this article: Saghir A, Aslam M, Faraz A, Ahmad L, Heuchenne C. Monitoring process variation using modified EWMA. *Qual Reliab Engng Int.* 2020;36:328–339. <https://doi.org/10.1002/qre.2576>